

PERFORM PRO 6X

SLIDES

SOFT-CLOSE UNDERMOUNT SLIDE

Soft Close Undermount Slide with 3-D Locking Device

- * 6-Way adjustable
- * Full Extension
- * Under Mounted
- * Lever Disconnect

- * Size: 9" ~ 21"
- * Load Capacity: 100 lbs
- * Material: Cold Rolled Steel
- * Case: 6 Pairs

ITEM NUMBER


8800-9-SOFT	
8800-12-SOFT	
8800-15-SOFT	
8800-18-SOFT	
8800-20-SOFT	
8800-21-SOFT	
8800-CLIPS	(100 PAIRS)
8000-BRKT	(200 PCS)
8100-BRKT	(90 PAIRS)




8000-BRKT



8100-BRKT




8800-CLIPS

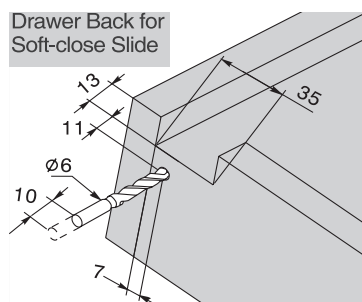

Installation for drawers between 12.7mm-16mm thick drawer sides

IDW= Internal Drawer Width
ICW= Internal Cabinet Width

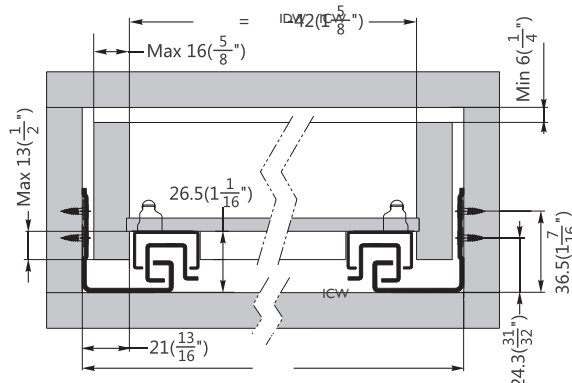

Drawer length	Runner length	Internal Cabinet Depth	
		Max	Min
(12")	317($12\frac{1}{2}$ ")	369($14\frac{9}{16}$ ")	326($12\frac{7}{8}$ ")
(15")	394($15\frac{1}{2}$ ")	446($17\frac{9}{16}$ ")	403($15\frac{7}{8}$ ")
(18")	470($18\frac{1}{2}$ ")	522($20\frac{9}{16}$ ")	479($18\frac{7}{8}$ ")
(21")	546($21\frac{1}{2}$ ")	598($23\frac{9}{16}$ ")	555($21\frac{7}{8}$ ")

Outside Drawer Width

Drawer side Thickness	5/8" (16mm)	1/2" (13mm)
Inside Cabinet Width Deduction	3/8" (10mm)	5/8" (16mm)